


**BUELL®**

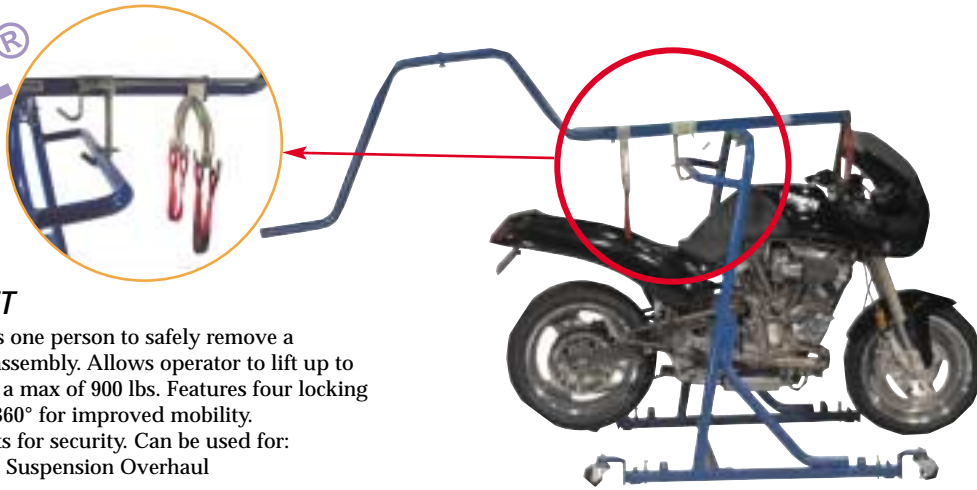

## K&L MC360 CRATE LIFT

A versatile shop tool that allows one person to safely remove a motorcycle out of the crate for assembly. Allows operator to lift up to three times their own weight to a max of 900 lbs. Features four locking heavy duty casters that swivel 360° for improved mobility. Four tie-down attachment points for security. Can be used for:

- Tire Changing
- Front End Suspension Overhaul
- Fairing Repairs

- 35-9262 K&L MC360 Crate Lift
- 35-9263 Replacement wheels for MC360 Crate Lift, Set of 4.



## BESTWAY IN GROUND LIFTS

These heavy duty, air/hydraulic motorcycle lifts are easily installed and require a 4-1/2" ft deep hole. Minimum height is 3", maximum rise above floor is 36". All units come complete with a three way valve for attaching air line to operate. Motorcycle lifts can be turned 360°. Lifting capacity is 1,200 lbs. for units with 5" pistons and 1,800 lbs for units with 6" piston. Lifts are supplied standard (no platform) with air valve installed on side. Add platform for needs of your service department.

- 35-9315 Standard lift with 5" piston. 18" x 18" top plate dimension
- 35-9316 Standard lift for Harley-Davidson® service, 5" piston, 18" x 18" top plate dimension, comes with pre-drilled top designed for securing motorcycle frame to top of lift.
- 35-9317 Standard lift with 6-1/2" piston. 18" x 18" top plate dimension
- 35-9318 Standard lift for Harley Davidson® service, 6-1/2" piston, 18" x 18" top plate dimension, comes with pre-drilled top designed for securing motorcycle frame to top of lift.
- 35-9319 Harley-Davidson® platform 35-9315 and 35-9317
- 35-9321 Standard Casing-use for 35-9315 and 35-9316
- 35-9322 Standard Casing-use for 35-9317 and 35-9318

## K&L MC470 IN-GROUND LIFT ADAPTER PLATE

This lift adapter plate mounts onto the Bestway in-ground lift and features 4 adjustable contact points. Slotted frame allows precise positioning. Bolts to 6-1/2" lifts only.

- 37-9899 In-ground lift adapter plate



## HANDY LIFT

Quality and utility without the expense. Features include:

- American made
- Heavy duty pneumatic cylinder
- Roller bearing slides
- 24 by 80 inch steel top with removable ramp
- Cast wheels allow shop movement
- 1,000 pound capacity
- Lifts up to 31 inches
- Foot pedal control

- 35-9060 Handy Lift only
- 35-9057 Electric Handy Lift only

## OPTIONAL ACCESSORIES

- 35-9101 Cycle Vice (30 lbs)-clamps the bike to the steel bed.
- 35-9056 Side Panels (85 lbs)-extend the width of the lift's steel top to accommodate ATVs and snowmobiles.
- 35-9102 Single Wheel Dolly -(15 lbs.)
- 35-9064 13" Front Extension for Lift
- 35-9071 12" Side Extension for Lift
- 35-9046 Lift Foot Valve Assy.
- 35-9365 Cylinder Repair Kit-(seals only)

